

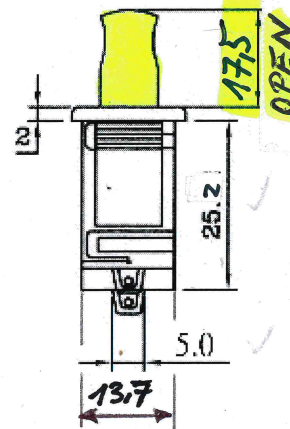



Rating :D.C. 30V 10A
 Contact R.[max] :D.C. 5V 1A 30m
 Insulation R.[min]:D.C. 500V 100M
 Withstand VOL. :A.C 500V 1minute
 Life cycle[max] :10,000 CYCLES

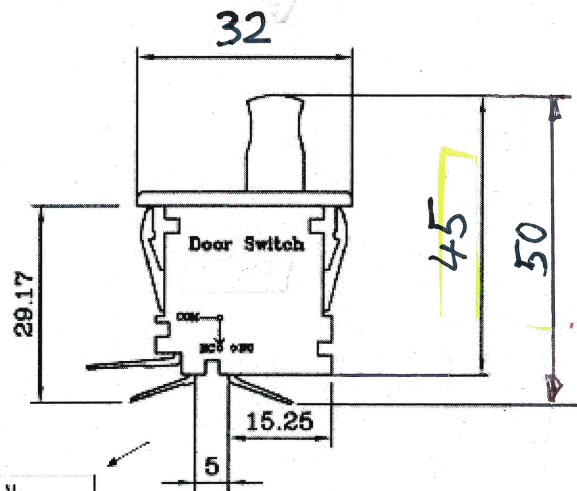

*****MATERIALS*****

A. CASE.....NYLON 66
 B. PUSH BUTTON.....NYLON 66
 C. TERMINAL.....BRASS
 D. MOVING BLADE.....BECU
 E. CONTACT.....AGNI
 F. SPRING.....S.W.P

±0.1mm

51785

3-PIN

1 : 1 mm

Door Switch