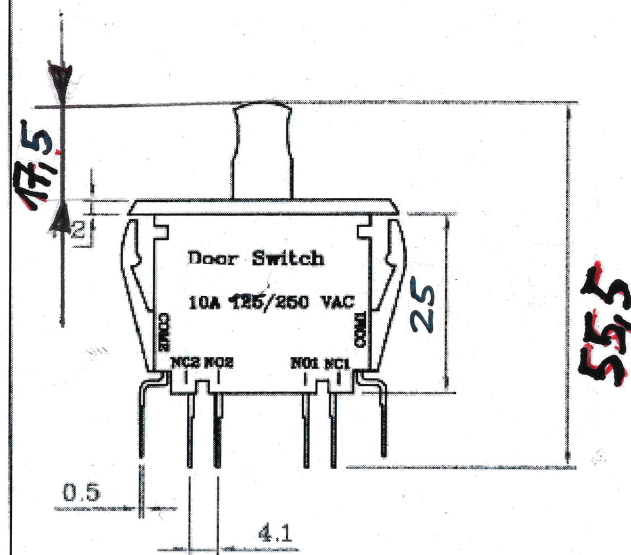
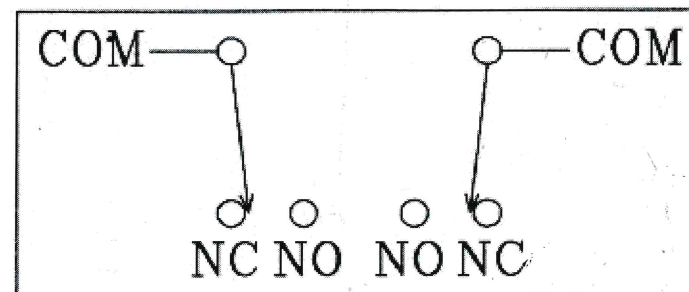


Rating	:D.C. 30V 10A
Contact R.[max]	:D.C. 5V 1A 30m
Insulation R.[min]	:D.C. 500V 100M
Withstand VOL.	:A.C 500V 1minute
Life cycle[max]	:10,000 CYCLES

*****MATERIALS*****

- A. CASE.....NYLON 66
B. PUSH BUTTON.....POM
C. TERMINAL.....BRASS
D. MOVING BLADE.....BECU
E. CONTACT.....AGNI
F. SPRING.....S.W.P

[illegible]